


Δe (mm) External length - Pitch length	13
Weight (gr/m)	73
min. pulley diam. (mm)	56
Working temperature	-30°C ÷ +80°C / -40°C ÷ +110°C
Relevant standards	DIN 7753 - ISO 4184
Relevant antistatic standards	ISO 1813
Materials	EPDM compound - CR blend - polyester cord



Code	External length LE (mm)	Code	External length LE (mm)	Code	External length LE (mm)	Code	External length LE (mm)	Code	External length LE (mm)	Code	External length LE (mm)	Code	External length LE (mm)
XPZ512	525	XPZ787	800	XPZ987	1000	XPZ1187	1200	XPZ1437	1450	XPZ1750	1763	XPZ2360	2373
XPZ562	575	XPZ800	813	XPZ1000	1013	XPZ1202	1215	XPZ1462	1475	XPZ1762	1775	XPZ2410	2423
XPZ587	600	XPZ812	825	XPZ1012	1025	XPZ1212	1225	XPZ1470	1483	XPZ1800	1813	XPZ2500	2513
XPZ607	620	XPZ837	850	XPZ1024	1037	XPZ1237	1250	XPZ1487	1500	XPZ1812	1825	XPZ2540	2553
XPZ612	625	XPZ850	863	XPZ1030	1043	XPZ1250	1263	XPZ1500	1513	XPZ1850	1863	XPZ2650	2663
XPZ630	643	XPZ852	865	XPZ1037	1050	XPZ1262	1275	XPZ1512	1525	XPZ1862	1875	XPZ2690	2703
XPZ637	650	XPZ862	875	XPZ1047	1060	XPZ1270	1283	XPZ1520	1533	XPZ1887	1900	XPZ2800	2813
XPZ662	675	XPZ875	888	XPZ1060	1073	XPZ1280	1293	XPZ1537	1550	XPZ1900	1913	XPZ2840	2853
XPZ670	683	XPZ887	900	XPZ1062	1075	XPZ1287	1300	XPZ1562	1575	XPZ1937	1950	XPZ3000	3013
XPZ687	700	XPZ900	913	XPZ1077	1090	XPZ1312	1325	XPZ1587	1600	XPZ1950	1963	XPZ3150	3163
XPZ710	723	XPZ912	925	XPZ1080	1093	XPZ1320	1333	XPZ1600	1613	XPZ2000	2013	XPZ3170	3183
XPZ722	735	XPZ925	938	XPZ1087	1100	XPZ1337	1350	XPZ1612	1625	XPZ2030	2043	XPZ3350	3363
XPZ730	743	XPZ937	950	XPZ1112	1125	XPZ1362	1375	XPZ1637	1650	XPZ2037	2050	XPZ3550	3563
XPZ737	750	XPZ940	953	XPZ1120	1133	XPZ1387	1400	XPZ1650	1663	XPZ2120	2133		
XPZ750	763	XPZ950	963	XPZ1137	1150	XPZ1400	1413	XPZ1662	1675	XPZ2160	2173		
XPZ762	775	XPZ962	975	XPZ1162	1175	XPZ1412	1425	XPZ1700	1713	XPZ2240	2253		
XPZ772	785	XPZ975	988	XPZ1180	1193	XPZ1420	1433	XPZ1737	1726	XPZ2280	2293		

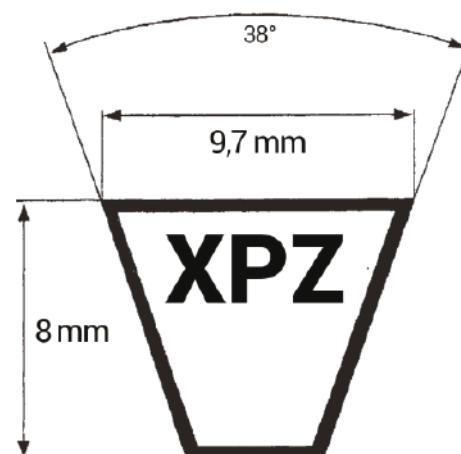